



88-01900136-5333BL (order number)

- RTD or Ohm input
- High measurement accuracy
- 3-wire connection
- Programmable sensor error value
- For DIN form B sensor head mounting



Stock version

Input : Pt100-3 wire
Range : 0...+150°C
Output : 4...20mA

Application

- Linearized temperature measurement with Pt100...Pt1000 or Ni100...Ni1000 sensor.
- Conversion of linear resistance variation to a standard analog current signal, for instance from valves or Ohmic level sensors.


Technical characteristics

- Within a few seconds the user can program 5333BL to measure temperatures within all RTD ranges defined by the norms.
- The RTD and resistance inputs have cable compensation for 3-wire connection.

Mounting / installation

- For DIN form B sensor head or DIN rail mounting with special metal clip.

Connections

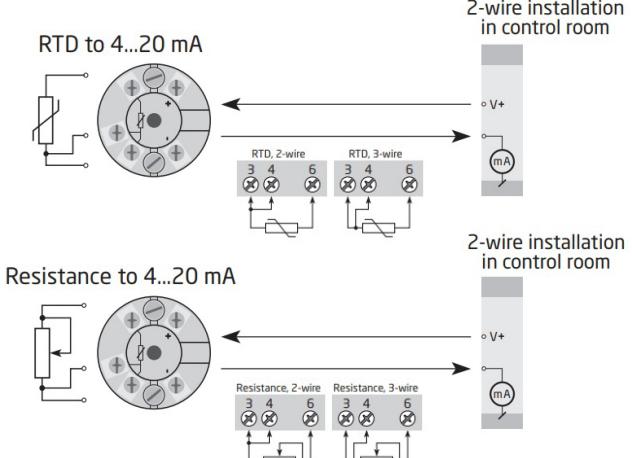



Environmental Conditions

Operating temperature..... -40°C to +85°C
 Calibration temperature..... 20...28°C
 Relative humidity..... < 95% RH (non-cond.)
 Protection degree (encl./terminal)..... IP68 / IP00

Mechanical specifications

Dimensions..... Ø 44 x 20.2 mm
 Weight approx..... 50 g
 Wire size..... 1 x 1.5 mm² stranded wire
 Screw terminal torque..... 0.4 Nm
 Vibration..... IEC 60068-2-6
 2...25 Hz..... ±1.6 mm
 25...100 Hz..... ±4 g

Common specifications

Supply

Supply voltage..... 8.0...35 VDC
 Internal power dissipation..... 25 mW...0.8 W

Response time

Response time (programmable)..... 0.33...60 s
 Voltage drop..... 8.0 VDC
 Warm-up time..... 5 min.
 Programming..... Loop Link
 Signal / noise ratio..... Min. 60 dB
 Accuracy..... Better than 0.1% of sel. range
 Signal dynamics, input..... 19 bit
 Signal dynamics, output..... 16 bit
 Effect of supply voltage change..... < 0.005% of span / VDC
 EMC immunity influence..... < ±0.5% of span

Input specifications

Common input specifications

Max. offset..... 50% of selected max. value

RTD input

RTD type..... Pt100, Ni100, lin. R
 Cable resistance per wire..... 10 Ω (max.)
 Sensor current..... > 0.2 mA, < 0.4 mA
 Effect of sensor cable resistance (3-wire)..... < 0.002 Ω / Ω
 Sensor error detection..... Yes

Linear resistance input

Linear resistance min....max..... 0 Ω...10000 Ω

Output specifications

Current output

Signal range..... 4...20 mA
 Min. signal range..... 16 mA
 Load (@ current output)..... ≤ (V_{supply} - 8) / 0.023 [Ω]
 Load stability..... ≤ 0.01% of span / 100 Ω
 Sensor error indication..... Programmable 3.5...23 mA
 NAMUR NE43 Upscale/Downscale..... 23 mA / 3.5 mA

Common output specifications

Updating time..... 135 ms
 of span..... = of the presently selected range

Observed authority requirements

EMC..... 2014/30/EU
 EAC..... TR-CU 020/201

Production

PR electronics A/S, Denmark

Ordering details

GÜNTHER temperature transmitter GT 5333BL

88-01900136-5333BL

Accessories

Configuration interface (Loop Link)..... 88-02970001-5909
 Metal clip for mounting the transmitter on a DIN rail..... 99-06879000-0000